


**P-750K330M**

Electronic control unit for 230 V central motors with built-in 433,92 MHz single-channel radio receiver, complete with enclosure.


**TECHNICAL DRAWINGS****USER GUIDE**

K330M

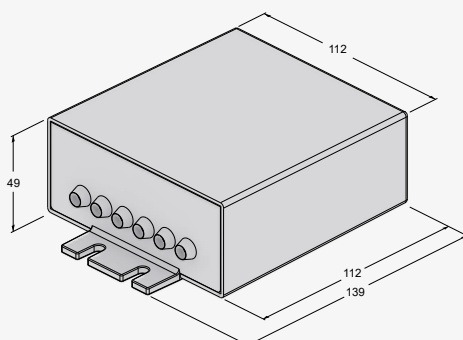

MADE IN  
ITALY

## WIRING DIAGRAM

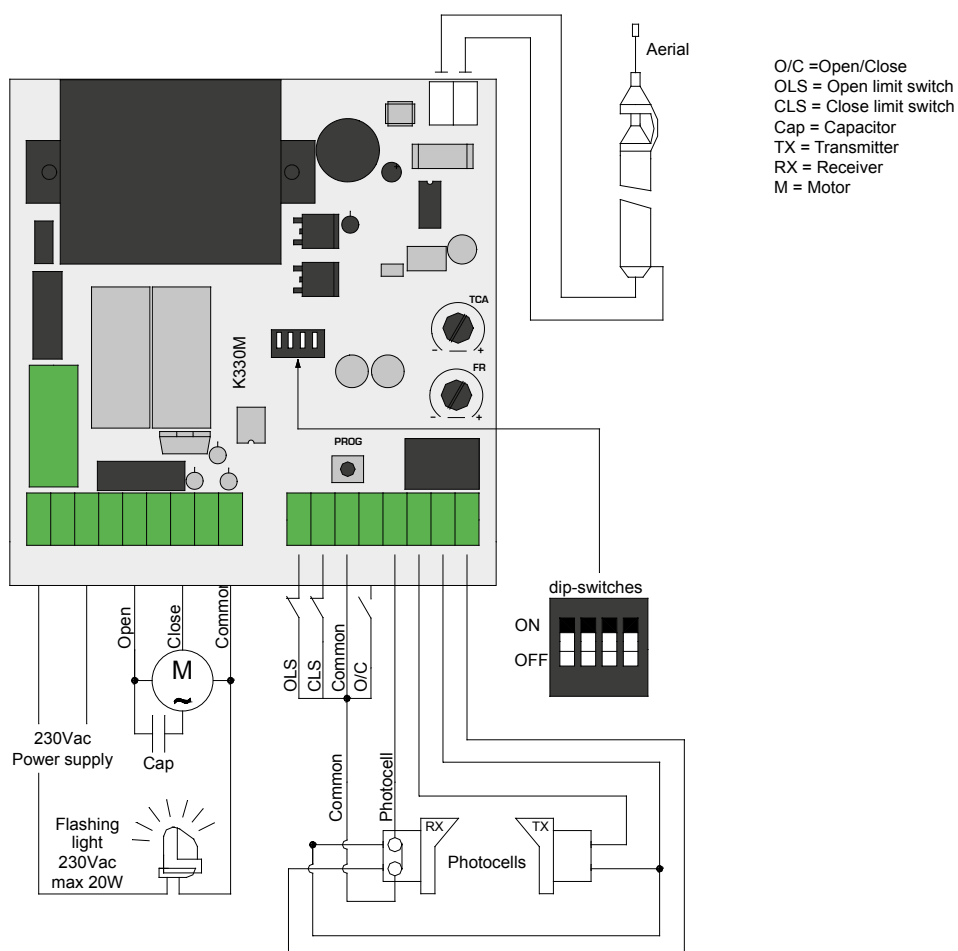

### Programmable Functions

#### K330M

|                                                    |   |
|----------------------------------------------------|---|
| Automatic operation                                | ✓ |
| Semiautomatic operation                            | ✓ |
| Man present functions                              |   |
| Pre-flashing disable                               |   |
| Gate open led with proportional flashing           |   |
| Gate open led                                      |   |
| Limit switches                                     | ✓ |
| Photocell test at start of manoeuvre               | ✓ |
| Disable photocell test                             | ✓ |
| Twin pair of photocells                            |   |
| Close 5 secs after photocells                      |   |
| Working time (TL) adjustment                       | ✓ |
| Gate open time (TCA) adjustment                    | ✓ |
| Gate open time (TCA) disable                       | ✓ |
| Delay wing closing                                 |   |
| Electronic force adjustment                        | ✓ |
| Automatic realignment after black-out              |   |
| Step-by-step operation (open-stop-close-stop-open) | ✓ |
| No reverse in opening manoeuvre                    | ✓ |
| Pedestrian feature                                 |   |
| Clock function                                     | ✓ |

#### Encoder

|                                     |   |
|-------------------------------------|---|
| Built-in radio card                 | ✓ |
| Slow-down                           |   |
| Receiver preset for digital keypads | ✓ |

### Outputs-Inputs

#### K330M

|                               |   |
|-------------------------------|---|
| M1 output                     | ✓ |
| M2 output                     |   |
| Flashing light output         | ✓ |
| Courtesy light output         |   |
| Electric lock output          |   |
| Gate open LED output          |   |
| 12 Vdc output for auxiliaries |   |
| 24 Vac output for auxiliaries | ✓ |
| Internal photocell FTI output |   |
| External photocell FTE output | ✓ |
| Open/close input              | ✓ |
| Pedestrian input              |   |
| Stop input                    |   |
| Open button input             |   |
| Close button input            |   |
| Sensitive edge input          |   |