



**250TXD2**


Two-channel transmitter, dipswitch technology, 433,92 MHz. Not compatible with the newest control boards generation.



**250TXD4**

Four-channel transmitter, dipswitch technology, 433,92 MHz. Not compatible with the newest control boards generation.

## TECHNICAL DRAWINGS

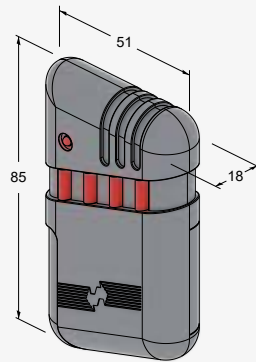

### FEATURES:

- frequency: 433,92 MHz
- range: up to 200 m in open air (the effective range depends on terrain and possible radio frequency interferences)
- 1024 code combinations
- dipswitch technology

### PROS:

- easy programming
- code can be easily changed by setting the switches inside the transmitter
- dipswitch transmitters can be programmed both in dipswitch and self-learning radio receivers
- a transmitter can be programmed into any number of self-learning radio receivers, thus avoiding the use of different transmitters